

48" EVOQUE DUAL FUEL RANGE

EVOQUE 400 SERIES



MODEL CODE

F4EDF486GBR1--**



Heavy Duty Grates



Continuous Grate Surface



Dual Crescendo Burner



Dual True Convection



Self Clean Oven



Multi-level cooking



Cool Touch Door



Digital Controls




F4EDF486GBR1-WH
GLOSSY WHITE RAL 9016



F4EDF486GBR1-IV
GLOSSY IVORY RAL 1013



F4EDF486GBR1-BK
GLOSSY BLACK RAL 9004



F4EDF486GBR1-SS
STAINLESS STEEL



F4EDF486GBR1-MW
MATTE WHITE RAL 9016



F4EDF486GBR1-MI
MATTE IVORY RAL 1013



F4EDF486GBR1-MB
MATTE BLACK RAL 9004



F4EDF486GBR1-RAL
RAL CODE

DESCRIPTION

The Evoque 48" dual fuel range draws inspiration from a time when ranges were crafted not only for function, but as expressions of Italian artistry and design heritage. Conceived as a distinctive statement piece, Evoque seamlessly blends the elegance and influence of the Italian Renaissance with the high-performance features North American consumers expect from a professional-style range. Each Evoque range is meticulously handcrafted in Italy's Veneto region, using only the finest materials to ensure a balance of timeless design, exceptional craftsmanship, and modern-day precision. Finished with a refined Brushed Brass metal finish, the Evoque range is offered in a selection of standard colors or can be custom ordered in an RAL color to suit your personal style.

SPECIFICATIONS

COOKING SURFACE

3 Heavy-duty, continuous cast iron grates
Cast iron griddle with tubular gas burner
11,500 BTU high / 2,000 BTU low
1 Matte finish porcelain burner bowl
3 Dual-Flame Crescendo burners
3 x 18,000 BTU max (NG)
3 Rapid burners
3 x 15,000 BTU max (NG)
Natural gas (LP convertible)

OVEN

Dual true convection (main oven)
True convection (accessory oven)
Self-cleaning + multi-baking (main oven)
Black porcelain enamel interior
Cool touch, soft-closing doors
Extra-large cavity and viewing area
3 Halogen lights (main oven)
2 Halogen lights (accessory oven)
2 Chrome racks per oven
1 Telescopic rack per oven
1 Meat probe
Total capacity 4.34 cu. ft. and 2.24 cu. ft.

OVEN FUNCTIONS


Bake
Broil
Roast
True Convection
Warm / Proof / Dehydrate
Meat Probe
Self-Clean (main oven)
Sabbath Mode (main oven)
Convection Roast

OPTIONAL ACCESSORIES

F6BG48STD	Standard trim
F6BG48HBT	High back trim
F6BG48BCI	Island trim
FMTRP30	Telescopic rack
FMTRP18	Telescopic rack

EVOQUE 400 SERIES

48" DUAL FUEL RANGE

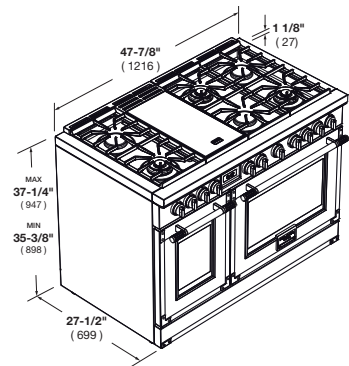

MODEL CODE		F4EDF486GBR1-**-
Series	48" Evoque - Dual Fuel	
COOKTOP		
Type Cooking Surface Gas Type	Gas Black Enameled NG or LP	
GAS COOKTOP FEATURES		
	Electric Flame Ignition and Re-ignition	Dual Crown Burners (Brass or Alluminum)
	Flame out sensing / Top Mount Injectors	Cast Iron Griddle (flat or with rack)
	LP Conversion Kit	Pressure Regulator
COOKING ZONES	6 Burner + Griddle	
Front Left	Dual Flame Burner	
Power (max/ min) G20 - 5"	18000 (BTU/h) - 5300W / 950 (BTU/h) - 275 W	
Power (max/ min) G31 - 10"	15000 (BTU/h) - 4400W / 950 (BTU/h) - 275 W	
Rear Left	Rapid Burner	
Power (max/ min) G20 - 5"	15000 (BTU/h) - 4400W / 2200 (BTU/h) - 645 W	
Power (max/ min) G31 - 10"	12000 (BTU/h) - 3800W / 2200 (BTU/h) - 645 W	
Middle "Left"	Griddle Burner (Thermostat Control)	
Griddle Burner	Thermostat Control Griddle Burner - 11500 (BTU/h) - 3370W / 2000 (BTU/h) - 590W	
Power (Max/Min) G20 - 5"/G31 - 10"		
Front Middle "Right"	Rapid Burner	
Power (max/ min) G20 - 5"	15000 (BTU/h) - 4400W / 2200 (BTU/h) - 645 W	
Power (max/ min) G31 - 10"	12000 (BTU/h) - 3800W / 2200 (BTU/h) - 645 W	
Rear Middle "Right"	Dual Flame Burner	
Power (max/ min) G20 - 5"	18000 (BTU/h) - 5300W / 950 (BTU/h) - 275 W	
Power (max/ min) G31 - 10"	15000 (BTU/h) - 4400W / 950 (BTU/h) - 275 W	
Front Right	Dual Flame Burner	
Power (Max/ Min) G20 - 5"	20000 (BTU/h) - 5850W / 950 (BTU/h) - 275 W	
Power (Max/ Min) G31 - 10"	15000 (BTU/h) - 4400W / 950 (BTU/h) - 275 W	
Rear Right	Rapid Burner	
Power (max/ min) G20 - 5	15000 (BTU/h) - 4400W / 2200 (BTU/h) - 645 W	
Power (max/ min) G31 - 10"	12000 (BTU/h) - 3800W / 2200 (BTU/h) - 645 W	
OVEN		
Type	ELECTRONIC (18")	ELECTRONIC SELF-CLEANING (30")
Oven Type	Multifunction 1 Fan (True Euro Conv.)	Multifunction 2 Fans (True Euro Conv.)
Temperature Regulation	Mechanical thermostat	Electronic
Functions		
True European Convection Bake (Multi-level)	•	•
Convection Broil / Convection Roast	• / •	• / •
Bake / Broil	• / •	• / •
Pizza (Lower Convection) / Thaw (Defrost)	• / -	- / •
Control Panel		
Control type	Thermostat	OKIDA OC3100 - Electronic
Clock, Temperature, Function Display / Commands	No display / 2 Knobs	White LED / 2 Knobs
Electric Oven Features For Eletronic Piro Oven		
	Preheat bar (25%, 50%, 75%, 100%)	Sabbath mode
	Hours clock format AM / PM	°F-°C degree unit
Oven Door(s)		
Oven Glass Window	Deep Embossed Window	Deep Embossed Window
Door Cooling System / Soft closing system	4 Pane Heat Resistant Glass / •	4 Pane Heat Resistant Glass / •
Handle style (30mm Ø)	Removable metal end cap	Removable metal end cap
Oven Cavity		
Net Capacity cu. ft.	2.4	4.4
Internal Width	12" (305 mm)	24" (610 mm)
Internal Depth	15 3/4" (400 mm)	15 3/4" (400 mm)
Cavity Enameling Colour	Black	Black
Rack Positions	6	6
Oven Lights	2 x 20W Halogen	3 x 20W Halogen
Heating Element		
Broil Upper Heating Element	2100 W (240 V)	3100 W (240 V)
Upper Auxiliary Element Wattage	700 W (240 V)	1032 W (240 V)
Concealed Bake Lower Heating Element	1750 W (240 V)	1400 + 600 W (240 V)
Convection Element	1 x 2500 W (240 V)	2 x 1300 W (240 V)
Oven Accessories		
Chromed racks	•	•
Enameled Grill set (basin + anti splash)	-	•
Telescopic chromed rack / Meat probe	• / -	• / 1
DIMENSIONS WEIGHT (In or Lbs)		
Overall dim - Width Height Depth (Included Handle)	47 3/4" (1216 mm) 35 3/8" (898) - 37 1/4" (947) 29 3/4" (756 mm)	
Gross weight Net weight	229 kg - 505 lb 204 kg - 450 lb	
POWER / RATINGS (208/240 V, 60 Hz)		
KW/Amps rating at 120-240 V, 60Hz	7 kW - 31,3 A	
KW/Amps rating at 120-208 V, 60Hz	6 kW - 29,5 A	
Power Cable Cable length	Nema 14-50P 59 1/16" (1500mm)	
INSTRUCTIONS FOR USE		
Use & Care Manual - Installation Manual	EN, SP, FR	