



## NEW 24" W. INTEGRATED WINE CELLAR

FDWCIC

### PROFESSIONAL FEATURES

- 13 wood front shelves store 78 bottles
- 48 in Upper Compartment
- 30 in Lower Compartment
- Uniform air circulation maintains consistent temperatures throughout
- Extremely quiet compressor with electronic controls
  - Maintains temperature to within 1°F
- Compressor located on the bottom allowing for full integration of the product
- Temperature Range: 39°F (4°C) to 64°F (18°C)
- Humidity control for enhanced wine preservation
- Innovative electronic control system maintains consistent temperature in the compartment
- Easy user interaction allows for personalization of the settings
- Energy-efficient LED lighting enhances visibility
- Stainless steel backwall



**FDWCIC7240R**  
(shown with custom panel)

### DESIGN FEATURES

- Proprietary Fully Articulating Hinge has three-dimensional adjustability for a perfect fit in integrated installations
- Hinge damper allows for smoothness when opening and closing door
- Unit is custom panel ready to accept matching cabinetry panels or the Viking Professional and RVL Door Panel Kits

### MODEL NUMBERS

- FDWCIC7240L – 24" W. Integrated Wine Column, Custom Panel; Left Hinge
- FDWCIC7240R – 24" W. Integrated Wine Column, Custom Panel; Right Hinge

### ACCESSORIES

- PHK528-SS – Professional Stainless Steel handle (1 piece/28")
- TBD – Replacement Water Filter

### WARRANTY

- 2-year full covers complete unit
- 6-year full – sealed refrigeration system
- 90-day full – cosmetic parts such as glass, painted items, and decorative items
- 12-year limited – sealed refrigeration system



## NEW 24" W. INTEGRATED WINE CELLAR

FDWCIC

### PROFESSIONAL DOOR PANEL KITS

- VI724WDPL\* – 24" W. Integrated Wine Cellar Door Panel Kit with Handle, Left Hinge
- VI724WDPR\* – 24" W. Integrated Wine Cellar Door Panel Kit with Handle, Right Hinge

### DOOR PANEL COLOR FINISHES\*

- Stainless Steel (SS)



- Available in 18 Exclusive Color Finishes: Antique Bronze (AN), Blush (BH), Cast Black (CS), Daffodil (DA), Damascus Gray (DG), Eucalyptus (EU), Golden Hour (GH), Ivy (IV), Martini (MA), Nantucket (NA), November Sky (NS), Onyx (ON), Pure White (PW), Slate Blue (SB), Spiced Cider (SC), Splash (SP), Squall (SQ), and Valentine (VA)



### RVL DOOR PANEL KITS

- MVI624WDPLOSS\*\* – 24" W. Integrated Wine Cellar Door Panel, RVL Stainless Steel, Left Hinge
- MVI624WDPRSS\*\* – 24" W. Integrated Wine Cellar Door Panel, RVL Stainless Steel, Right Hinge

### DOOR PANEL FINISHES\*\*

- Stainless Steel (SS)



24" W. INTEGRATED WINE CELLAR	
<b>DESCRIPTION</b>	<b>FDWCIC7240</b>
<b>Overall Width</b>	23-7/8 (60.8 cm)
<b>Overall Height</b>	82-3/4" (210.2 cm) minimum; 84 1/16" (213.5 cm) maximum
<b>Overall Depth from Rear</b>	To rear of side trim – 22-3/16" (56.4 cm) To front of top grille – 24-1/2" (62.2 cm) To front edge of handle – 27" (68.6 cm)
<b>Cutout Width</b>	29-1/2" (74.9 cm)
<b>Cutout Height</b>	82-7/8" (210.5 cm) minimum; 84 1/16" (213.5 cm) maximum
<b>Cutout Depth</b>	24" (61.0 cm)
<b>Electrical Requirements</b>	115VAC/60Hz; 5' (152.4 cm), 3-wire cord with grounded 3-prong plug attached to product
<b>Maximum Amp Usage</b>	2.0 amps
<b>Maximum Storage Capacity</b>	78 bottles
<b>Approximate Shipping Weight</b>	560 lb. (252 kg)

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.


### INSTALLATION CUTOUT FEATURES: PANEL-READY

**A** Minimum cutout height  
84" (2134 mm)

**Cutout width**  
24" model: 24" (610 mm)



**Minimum cutout depth**  
24" (610 mm) + panel thickness for flush installation

**Area to be left clear for the anti-tipping brackets**  
5" (127 mm) for both right and left sides

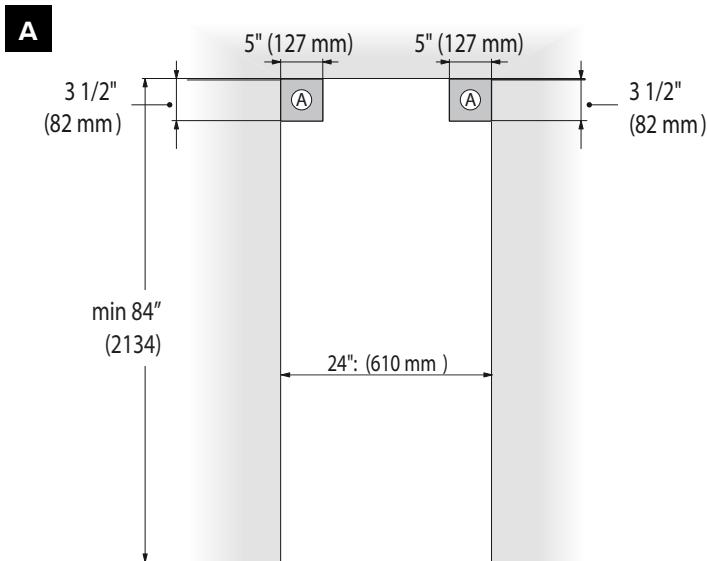


**B** Appliance height  
83 1/2" (2120 mm) + 1" (25 mm)

### WIDTH OF APPLIANCE BODY

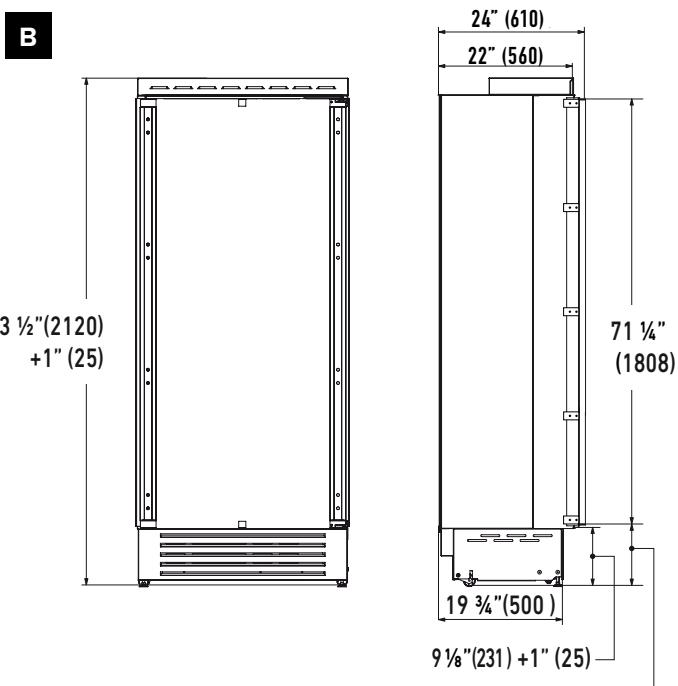
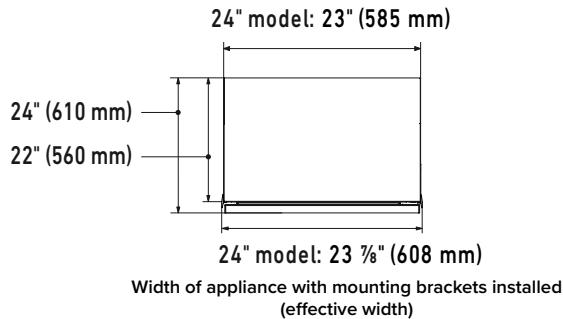


WIDTH	DOOR WIDTH A
<b>24"</b>	23 3/4" (604)

Panels with thickness ranging between 3/4" (19 mm) and 1-1/8" (28 mm).  
Door panels with max weight of 75 lbs. (34 kg).

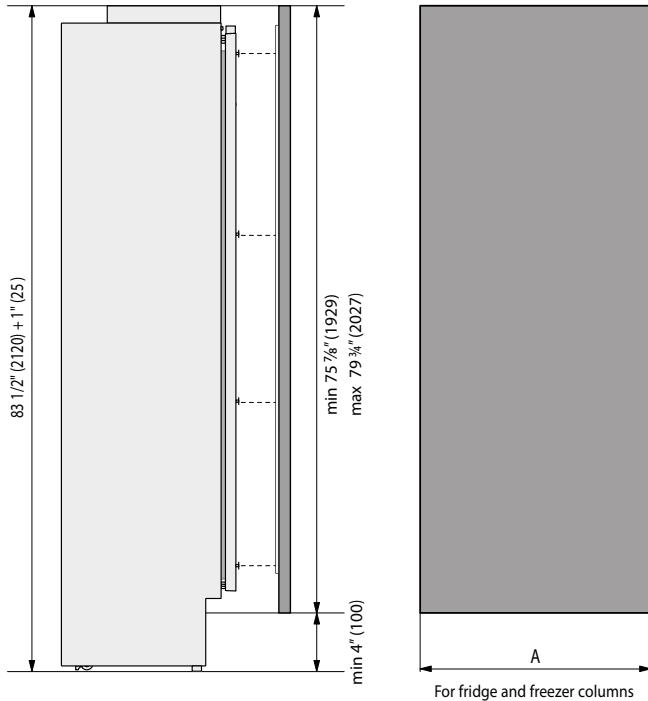
**CUTOUT DIMENSIONS FOR COMBINED INSTALLATION**

<b>B</b>	<b>A</b>			
	<b>18"</b>	<b>24"</b>	<b>30"</b>	<b>36"</b>
18"	36" (914 mm)	42" (1067 mm)	48" (1220 mm)	54" (1372 mm)
24"	42" (1067 mm)	48" (1220 mm)	54" (1372 mm)	60" (1520 mm)
30"	48" (1220 mm)	54" (1372 mm)	60" (1520 mm)	66" (1676 mm)
36"	54" (1372 mm)	60" (1524 mm)	66" (1676 mm)	72" (1829 mm)

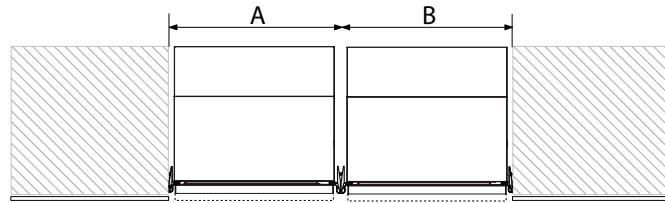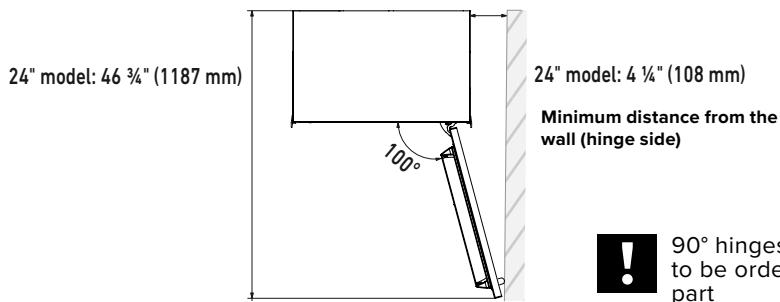
**DOOR-SWING CLEARANCE**


! 90° hinges available to be ordered as spare part