

KJ15041123/KJ15041523  
**KAMADOJOE®**  
**Konnected Joe™**  
**Wire Harness**



**CAUTION - SAFETY PRECAUTIONS - READ BEFORE USE**




- Make sure your grill has fully cooled before handling to avoid burns.
- Some components may have sharp edges. Use caution to avoid injury.
- Disconnect the power supply from the grill before handling.



Remove two screws from front module.



Remove front module.

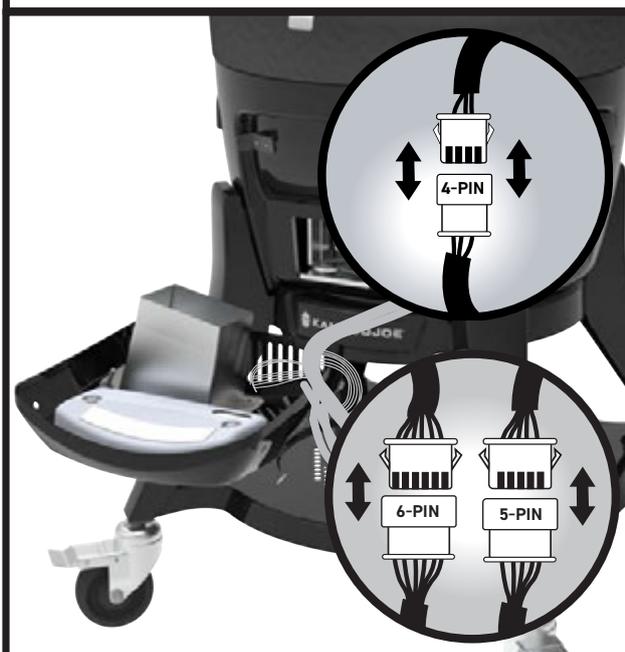

Disconnect the wire harness from the front module. Use caution do not apply tension on the wire harness.



Unplug lid switch, pit probe, and power supply.




Remove the three wire harness cover screws.



Remove the wire harness cover.



Loosen two screws from rear module. Please note, the screws do not have to be fully removed to disengage the rear module.

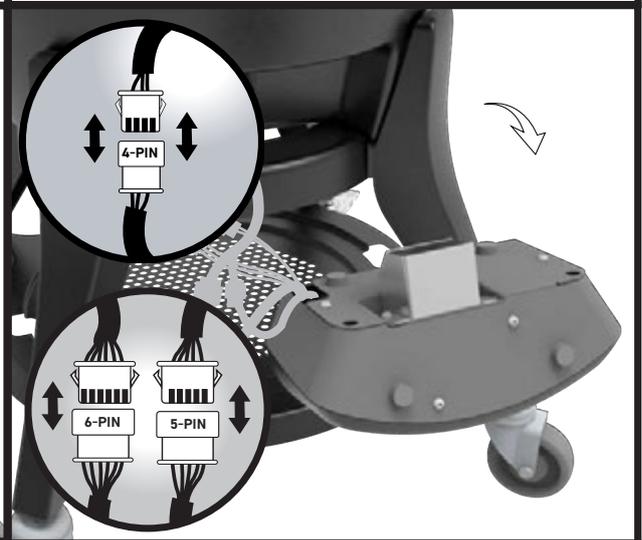

Disconnect the wire harness from the rear module. Use caution do not apply tension on the wire harness. (Note - leave the element wires connected).



Fish the new wire harness through the front pass through hole.



Fish the new wire harness through the rear pass through hole.

**Repeat the steps in reverse order to install the new wire harness.**