



Electric Built-in Cooktop


PRODUCT MODEL NUMBERS

RCS2002R RCS3014R
 RCS2012R RCS3614R
 RCS3004R


Electrical: A 4-wire or 3-wire, single phase, 240 volt, 60 Hz., AC only electrical supply is required on a separate, 40-amp circuit, fused on both sides of the line.

NOTE: The 15" (38.1 cm) model series requires a 20-amp circuit.

OVERALL DIMENSIONS

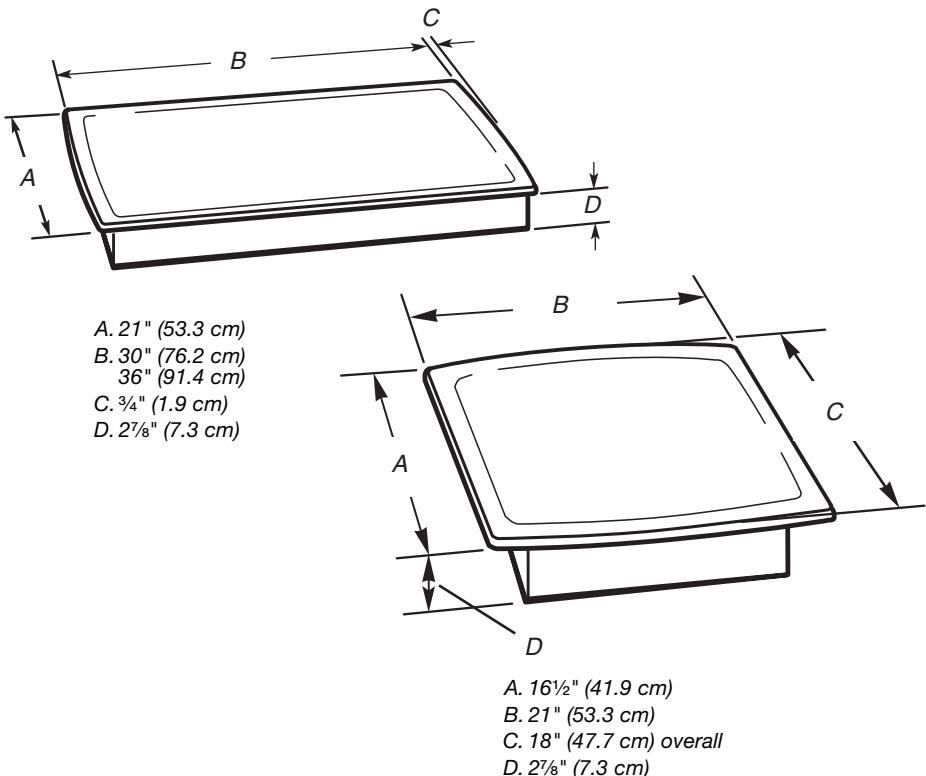


CABINET OPENING DIMENSIONS

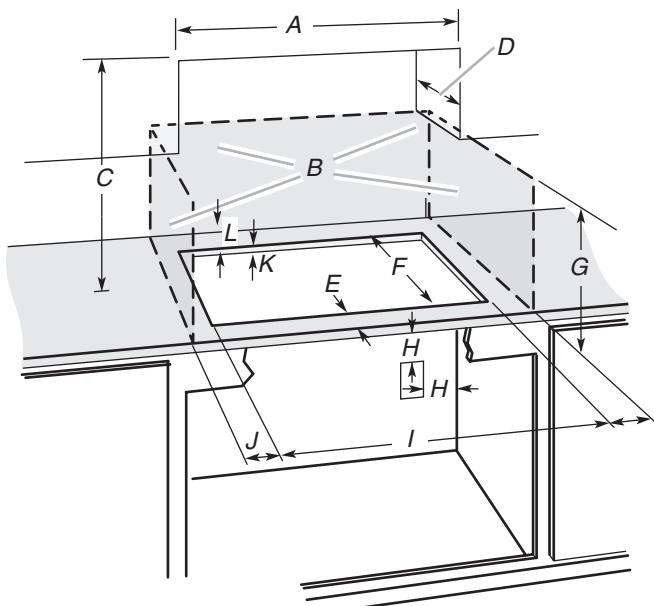

- A. 21" (53.3 cm) on 21" (53.3 cm) models; 30" (76.2 cm) models on 30" (76.2 cm) models; 36" (91.4 cm) on 36" (91.4 cm) models
- B. Combustible area above countertop (shown by dashed box above)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of unprotected wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is protected by not less than 1/4" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
- D. 13" (33 cm) recommended upper cabinet depth
- E. 3" (7.6 cm)

For 21" (53.3 cm) model only:

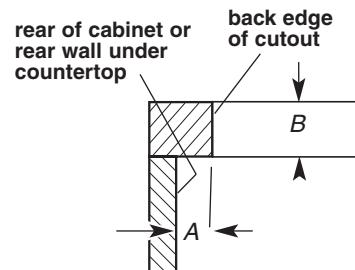

- A. 1 1/16" (1.7 cm) min.
- B. 1 5/16" (3.4 cm) max.

- F. 15 1/2" (34.4 cm) on 21" (53.3 cm) models; 18 5/8" (45.7 cm) on 30" (76.2 cm) models and 36" (91.4 cm) models
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet; 12" (30.5 cm) minimum from bottom of countertop; 10" (25.4 cm) from right side of cabinet
- I. 18 5/8" (33.7 cm) on 21" (53.3 cm) models; 28 7/8" (47.3 cm) on 30" (76.2 cm) models; 35" (90.2 cm) on 36" (91.4 cm) models
- J. 1" (2.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
- K. 1 5/16" (3.4 cm) max. counter thickness on 21" (53.3 cm) models. See following illustration.
- L. 1" (2.5 cm) minimum clearance between back wall and countertop