

# LRIN6323YE

6.3 cu. ft. Induction Single Smart Range with Air Fry, ProBake Convection®, EasyClean®, Self-Clean and Premium Handle

6.3 cu. ft Capacity  
ProBake Convection® with Air Fry  
Air Fry Basket Included  
EasyClean® and Self Clean  
WideView™ Window  
LG ThinQ® with ThinQ Care  
Storage Drawer  
ENERGY STAR® Certified



#### AVAILABLE COLORS



STAINLESS STEEL



## ThinQ Care

### Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

#### SUMMARY

|  |                                 |
|--|---------------------------------|
| Type   | Electric Single Oven            |
| Total Oven Capacity (cu. ft.)                  | 6.3                             |
| Available Colors                               | Stainless Steel,                |
| <b>COOKTOP</b>                                 |                                 |
| Type   | Induction                       |
| No of Radiant Elements                         | 4                               |
| Element Size/ Wattage - Left Rear              | 1800(Boost)/ 1300(Normal) (6")  |
| Element Size/ Wattage - Right Rear (Warm Zone) | -                               |
| Element Size/ Wattage - Left Front             | 3200(Boost)/ 2100(Normal) (8")  |
| Element Size/ Wattage - Right Front            | 3900(Boost)/ 2400(Normal) (11") |
| Center (Warming Zone)                          | 1800(Boost)/ 1300 (Normal) (6") |
| Hot Surface LED Indicator                      | Yes                             |

#### OVEN FEATURES

|   |   |
|---|---|
| Broil Element (Watt)                        | Sheath (4.2Kw)  |
| Oven Bake Element Wattage Convection (Watt) | Sheath 2500W  |
| Convection Fan                              | Dual Speed (High/Low)   |
| Convection Type                             | ProBake® Convection   |
| Oven Mode                                   | Bake, Convection Bake, Convection Roast, Broil High, Broil Low, Air Fry, Warm, EasyClean®, Self Clean |
| Oven Control Features                       | Keypad  |
| Convection Conversion                       | Yes   |
| EasyClean®                                  | Yes   |
| EasyClean® Time                             | 10 mins   |
| GoCook Smart Oven Light                     | 1 Light   |
| No. of Rack Positions                       | -   |
| Door Lock                                   | No  |
| Automatic Safety Shut Down                  | After 12 Hours  |
| InstaView                                   | No  |

#### DRAWER FEATURES

|              |         |
|--------------|---------|
| Type         | Storage |
| Time Control | No      |

#### CONTROL FEATURES

|                                  |                       |
|----------------------------------|-----------------------|
| Cooktop Control Type             | Knobs Control         |
| Oven Control Type                | Keypad                |
| Display                          | White LED             |
| Language                         | English               |
| Clock                            | 12hr or 24hr (Option) |
| Kitchen Timer                    | Yes                   |
| Timed Cook                       | Yes                   |
| Temperature Unit of Measure      | Fahrenheit / Celsius  |
| Cooking Complete Reminder Volume | Beeper (Hi, Lo, Off)  |
| Certified Sabbath Mode           | Yes                   |

#### ThinQ® SMART FEATURES

|                         |                                 |
|-------------------------|---------------------------------|
| ThinQ® (Wi-Fi Enabled)  | Yes                             |
| ThinQ Up                | Yes                             |
| Check & Control         | Yes                             |
| Voice Control           | Google Assistant & Amazon Alexa |
| Proactive Customer Care | Yes                             |
| SmartDiagnosis™         | Yes                             |

#### APPEARANCE

|                     |                       |
|---------------------|-----------------------|
| All Available Color | Stainless Steel       |
| Knobs               | NI-CR Plated (Weight) |
| Knobs Material      | PC+ABS                |
| Handle              | Aluminum              |
| Handle Material     | Aluminum              |
| Handle Type         | Bar Type              |
| PrintProof™ Finish  | No                    |
| Oven Door Feature   | WideView™ Window      |

|                |                 |
|----------------|-----------------|
| Cooktop Finish | Stainless Steel |
|----------------|-----------------|

#### ACCESSORIES

|                |         |
|----------------|---------|
| Standard Rack  | Yes (2) |
| Air Fry Basket | Yes (1) |

#### POWER/ RATINGS

|                             |        |
|-----------------------------|--------|
| Amp Rating at 208V          | 45.4 A |
| Amp Rating at 240V          | 47.5 A |
| KW Rating at 208V           | 9.45kW |
| KW Rating at 240V           | 11.4W  |
| Required Power Supply (amp) | 40A    |

#### ENERGY

|                        |     |
|------------------------|-----|
| ENERGY STAR® Certified | Yes |
|------------------------|-----|

#### DIMENSIONS/ CLEARANCES/ WEIGHT

|                                      |                              |
|--------------------------------------|------------------------------|
| Shipping Weight                      | 215.2 lbs                    |
| Product Weight                       | 182.1 lbs                    |
| Cabinet Width                        | 30"                          |
| Overall Depth - without handle       | 26 3/4"                      |
| Overall Depth - with handle          | 29 1/8"                      |
| Overall Height                       | 46 1/2"                      |
| Overall Width                        | 30"                          |
| Oven Interior Dimensions (W x H x D) | 24 27/32 x 17 7/8 x 22 1/16" |
| Height to Cooking Surface            | 36"                          |
| Drawer Dimensions (W x H x D)        | 22 3/8 x 4 x 14 11/16"       |
| Carton Dimensions (W x H x D)        | 32 1/2 x 51 x 30 1/2"        |


#### LIMITED WARRANTY

|               |        |
|---------------|--------|
| Parts & Labor | 1 Year |
|---------------|--------|

#### UPC CODE


|            |              |
|------------|--------------|
| LRIN6323YE | 048231349642 |
|------------|--------------|

## DIMENSION / CLEARANCES

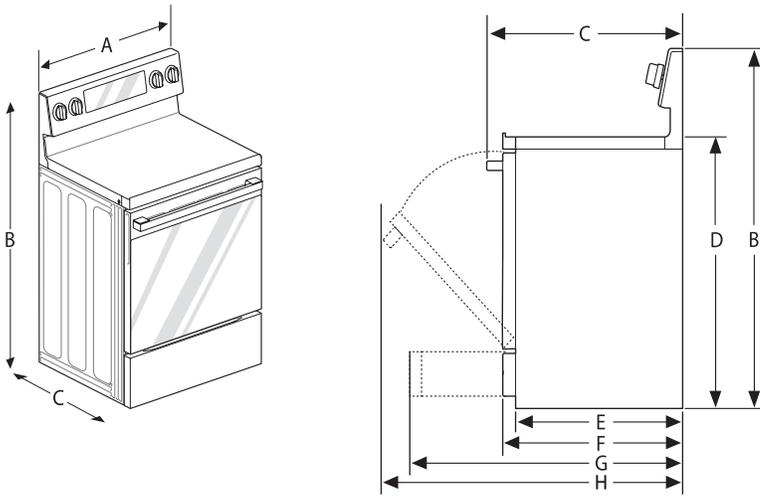

### DIMENSIONS

|   |  |                      |
|---|--|----------------------|
| A | Width  | 29 7/8" (759 mm)     |
| B | Height   | 46 1/2" (1,181 mm)   |
| C | Depth (Includes Door Handle)   | 29 1/8" (740mm)      |
| D | Height (Excludes Controller)   | 36" (914 mm)         |
| E | Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles) | 24 5/8" (627 mm)     |
| F | Depth (Excludes Door Handle)   | 26 3/4" (680 mm)     |
| G | Depth when drawer is fully opened  | 36 13/16" (935mm)    |
| H | Depth when door is fully opened  | 49 13/16" (1,265 mm) |

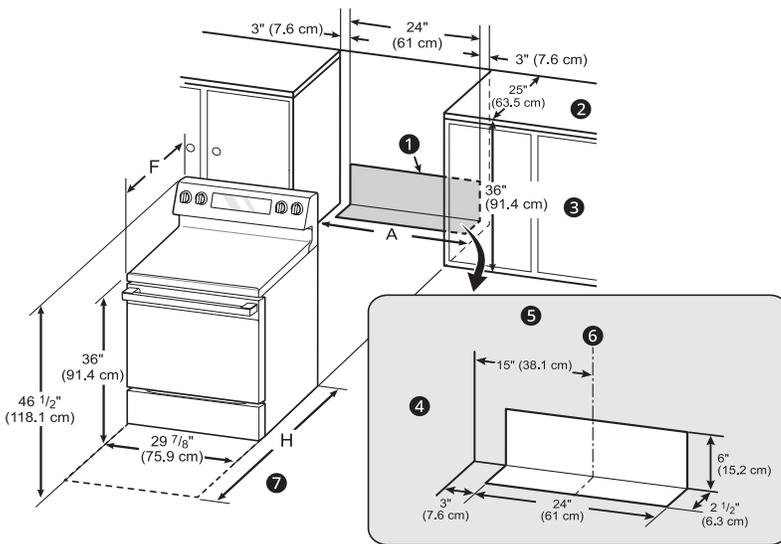

### MINIMUM DIMENSIONS

|   |  |                 |
|---|--|-----------------|
| 1 | Minimum distance from top of range to combustible surface overhead | 30" (76.2 cm)   |
| 2 | Minimum clearance to left/right wall                               | 5" (12.7 cm)    |
| 3 | Maximum depth for cabinets above countertops                       | 13" (33.0 cm)   |
| 4 | Front edge of the range side panel forward from cabinet            | 2 1/4" (6.3 cm) |
| 5 | To cabinets below cooktop and at the range back)                   | 0"              |
| 6 | Minimum opening in overhead cabinets                               | 30" (76.2 cm)   |
| 7 | Minimum distance from countertop to overhead cabinets at side      | 15" (38.1 cm)   |
| 8 | Height of countertop   | 36" (91.4 cm)   |

### NOTE

- 1 30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than no. 28MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.
- 7 15" (38.1 cm) minimum between countertop and adjacent cabinet bottom.
- Important - Save for the use of the local electrical inspector.
- For installation in Canada, a free-standing range is not to be installed closer than 15/32" (12 mm) from any adjacent surface.

